

# MaxTester 700 OTDR Series



Fully featured, dedicated portable OTDRs designed for your basic OTDR testing needs.

## KEY FEATURES

7-inch touchscreen

Dynamic range of up to 37 dB

Test through high-port-count splitters (up to 1x128)

Point-to-point link testing on more than 80 km

In-service troubleshooting port (1625 nm filtered)

## APPLICATIONS

FTTx/MDU passive optical network testing

Metro/access, last mile and FTTH/DAS, point-to-point link testing

SPEC SHEET

## MAXTESTER 700 SERIES: COST-OPTIMIZED, YET COMPREHENSIVE OTDRS

The MaxTester 700 series comprises small, lightweight, dedicated portable OTDRs offering a large screen for easy manipulations. These affordable units integrate EXFO's renowned OTDR performance and value-added features in a basic solution that reflects today's needs. The MaxTester series comes in two models: the MaxTester 710 (last mile and access point-to-point OTDR) and the MaxTester 730 (metro and FTTH PON/MDU OTDR).

The MaxTester 710 is perfect for point-to-point last mile testing of passive optical networks (PON) within FTTx architectures. It is ideal for testing short fibers, e.g., inside a CO environment or in a fiber-to-the-antenna (FTTA) network.

The MaxTester 730 is designed for end-to-end testing through up to 1x128 splitters in a PON environment. The 1625 nm out-of-band live testing port allows for efficient troubleshooting. Metro point-to-point testing also makes it possible to test over 80 km of fiber, depending on the network topology.

### SOFTWARE APPLICATIONS




Providing lightning-fast results in the first step of fiber-link testing, ConnectorMax is the industry's first platform-based, automated connector inspection application; it delivers quick pass/fail assessment of connector endfaces and is specifically designed to save both time and money in the field.

### SOFTWARE UTILITIES

<b>Update Manager</b>	Ensure that your MaxTester is up-to-date with the latest software.
<b>VNC configuration</b>	The Virtual Network Computing utility allows technicians to easily communicate settings to remote colleagues.
<b>Microsoft Internet Explorer</b>	Access the Web directly from your platform interface.
<b>Bluetooth file sharing</b>	Share files from your MaxTester to any Bluetooth-enabled device.
<b>Wi-Fi connection</b>	Display available Wi-Fi connections and save your default settings.

## PACKAGED FOR EFFICIENCY

- |  |   |  |
|--|---|--|
| <ul style="list-style-type: none"> <li>1 Power meter and VFL</li> <li>2 Stylus</li> <li>3 Two USB 2.0 ports</li> <li>4 1 GigE port</li> <li>5 Headset</li> </ul> | <ul style="list-style-type: none"> <li>6 Fiber inspection probe video port</li> <li>7 AC adapter</li> <li>8 Back stand</li> <li>9 Speaker out</li> <li>10 Brightness</li> </ul> | <ul style="list-style-type: none"> <li>11 Keyboard/screen capture</li> <li>12 Switch application</li> <li>13 Power on/off</li> <li>14 Battery LED</li> <li>15 Battery</li> </ul> |
|--|---|--|

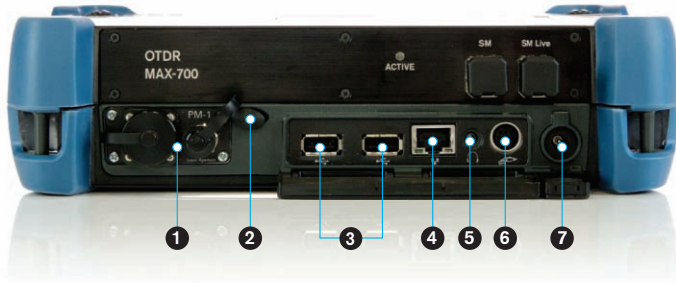

SPECIFICATIONS<sup>a</sup>

TECHNICAL SPECIFICATIONS	MAXTESTER 710	MAXTESTER 730
Display	Touchscreen, color, 800 x 480 TFT, 178 mm (7 in)	Touchscreen, color, 800 x 480 TFT, 178 mm (7 in)
Interfaces	Two USB 2.0 ports RJ-45 LAN 10/100/1000 Mbit/s Fiber inspection probe connector port (video) Built-in Bluetooth and Wi-Fi (hardware option)	Two USB 2.0 ports RJ-45 LAN 10/100/1000 Mbit/s Fiber inspection probe connector port (video) Built-in Bluetooth and Wi-Fi (hardware option)
Storage	4 GB internal memory (flash)	4 GB internal memory (flash)
Batteries	Rechargeable lithium-ion batteries 7 hours of operation as per Telcordia (Bellcore) TR-NWT-001138	Rechargeable lithium-ion batteries 7 hours of operation as per Telcordia (Bellcore) TR-NWT-001138
Power supply	AC/DC adapter, input 100-240 VAC, 50-60 Hz, 1.6 A max, output 24 VDC, 3.75 A	AC/DC adapter, input 100-240 VAC, 50-60 Hz, 1.6 A max, output 24 VDC, 3.75 A
Computer	Intel ATOM processor Windows Embedded Standard operating system	Intel ATOM processor Windows Embedded Standard operating system
Wavelength (nm) <sup>b</sup>	1310 ± 20/1550 ± 20	1310 ± 20/1550 ± 20/1625 ± 10
Dynamic range (dB) <sup>c</sup>	29/28	37/35/35
Event dead zone (m) <sup>d</sup>	2.5	0.8
Attenuation dead zone (m)	10	4/4.5/4.5
Distance range (km)	Singlemode: 1.25, 2.5, 5, 10, 20, 40, 80, 160	Singlemode: 1.25, 2.5, 5, 10, 20, 40, 80, 160, 260
Pulse width (ns)	Singlemode: 5, 10, 30, 50, 100, 275, 500, 1000, 2500, 10 000, 20 000	Singlemode: 5, 10, 30, 50, 100, 275, 500, 1000, 2500, 10 000, 20 000
Linearity (dB/dB)	±0.03	±0.03
Loss threshold (dB)	0.01	0.01
Loss resolution (dB)	0.001	0.001
Sampling resolution (m)	Singlemode: 0.08 to 5	Singlemode: 0.04 to 5
Sampling points	Up to 64 000	Up to 128 000
Distance uncertainty (m) <sup>e</sup>	±(0.75 + 0.005 % x distance + sampling resolution)	±(0.75 + 0.0025 % x distance + sampling resolution)
Measurement time	User-defined (60 min. maximum)	User-defined (60 min. maximum)
Typical real-time refresh (Hz)	3	3
Stable source output power (dBm) <sup>f</sup>	-11	-2.5

**Notes**

- a. All specifications valid at 23 °C ± 2 °C with an FC/APC connector, unless otherwise specified.
- b. Typical.
- c. Typical dynamic range with longest pulse and three-minute averaging at SNR = 1.
- d. Typical dead zone for reflectance below -45 dB, using a 5 ns pulse.
- e. Does not include uncertainty due to fiber index.
- f. Typical output power is given at 1550 nm.

## GENERAL SPECIFICATIONS

Size (H x W x D)	190 mm x 252 mm x 66 mm (7 1/2 in x 9 15/16 in x 2 5/8 in)
Weight (with battery)	2.2 kg (4.7 lb)
Temperature	Operating Storage
	0 °C to 50 °C (32 °F to 122 °F) -40 °C to 70 °C (-40 °F to 158 °F) <sup>a</sup>
Relative humidity	0 % to 95 % non-condensing

## ACCESSORIES

FP4S	400x fiber inspection probe	GP-2016	10 foot RJ-45 LAN cable
FP4D	200x/400x fiber inspection probe	GP-2028	Computer security cable kit
GP-10-086	Rigid carrying case	GP-2137	USB-to-RS-232 converter
GP-10-072	Semi-rigid carrying case	GP-2138	DC car adapter/inverter
GP-302	USB mouse	GP-2144	USB 16G micro-drive
GP-1002	Headset	GP-2155	Carry-on size backpack <sup>b</sup>
GP-1008	VFL adapter (2.5 mm to 1.25 mm)	GP-2158	Utility glove
GP-2001	USB keyboard		

PM-1 BUILT-IN POWER METER SPECIFICATIONS <sup>c</sup>

Calibrated wavelengths (nm)	850, 1300, 1310, 1490, 1550, 1625, 1650
Power range (dBm)	26 to -64 (GeX)
Uncertainty (%) <sup>d</sup>	±5 % ± 0.4 nW (GeX)
Display resolution (dB)	
GeX	0.01 = max to -54 dBm 0.1 = -50 dBm to -60 dBm 1 = -60 dBm to min
Automatic offset nulling range <sup>e</sup>	Max power to -40 dBm for GeX
Tone detection (Hz)	270/1000/2000

## LASER SAFETY



21 CFR 1040.10 AND IEC 60825-1:2007  
CLASS 1M WITHOUT VFL OPTION  
CLASS 3R WITH VFL OPTION

## VISUAL FAULT LOCATOR (VFL) (OPTIONAL)

Laser, 650 nm ±10 nm
CW
Typical P <sub>out</sub> in 62.5/125 μm: 3 dBm (2 mW)

## Notes

- 20 °C to 60 °C (-4 °F to 140 °F) with the battery pack.
- The selected model may change without notice.
- At 23 °C ± 1 °C, 1550 nm and FC connector. With modules in idle mode. Battery operated.
- Up to 5 dBm.
- For ±0.05 dB, from 18 °C to 28 °C.

## ORDERING INFORMATION

### MAX-700-XX-XX-XX-XX-XX-XX-XX

#### Display and connectivity

S1 = TFT active screen  
 S2-RF = Outdoor-enhanced screen with built-in Wi-Fi and Bluetooth  
 RF = With RF capability (Wi-Fi and Bluetooth)

#### Software options

00 = Without any software option  
 FPSA = ConnectorMax analysis software  
 FPSAMF = ConnectorMax kit: single-fiber analysis and reporting; multiple fiber connector assessment wizard and reporting  
 AD = Auto diagnostic for OTDR software (macroband detection summary functionality and fault finder)

#### Power meter

00 = Without power meter  
 VFL1 = Visual fault locator only  
 VPM2X = VFL platform; PM; GeX detector

#### Connector adapter

FOA-12 = Biconic  
 FOA-14 = NEC D4: PC, SPC, UPC  
 FOA-16 = SMA/905, SMA-906  
 FOA-22 = FC/PC, FC/SPC, FC/UPC, FC/APC  
 FOA-28 = DIN 47256, DIN 47256/APC  
 FOA-32 = ST: ST/PC, ST/SPC, ST/UPC  
 FOA-54 = SC: SC/PC, SC/SPC, SC/UPC, SC/APC  
 FOA-78 = Radiall EC  
 FOA-96B = E-2000 E-2000/APC  
 FOA-98 = LC  
 FOA-99 = MU  
 WC2 = FOA-FC-ST-SC-LC

#### Connector<sup>b</sup>

EA-EUI-28 = APC/DIN 47256  
 EA-EUI-89 = APC/FC narrow key  
 EA-EUI-91 = APC/SC  
 EA-EUI-95 = APC/E-2000  
 EI-EUI-28 = UPC/DIN 47256  
 EI-EUI-76 = UPC/HMS-10/AG  
 EI-EUI-89 = UPC/FC narrow key  
 EI-EUI-90 = UPC/ST  
 EI-EUI-91 = UPC/SC  
 EI-EUI-95 = UPC/E-2000

#### Model

MAX-710-M1 = MAX-710-ACCESS  
 Last-mile singlemode OTDR module, 1310/1550 nm, 29/28 dB (9/125 μm)  
 MAX-730-M1 = MAX-730-FTTx  
 Singlemode OTDR module, 1310/1550 nm, 37/35 dB (9/125 μm)  
 MAX-730-M2 = MAX-730-FTTx  
 Singlemode OTDR module  
 Port 1: 1310/1550 nm, 37/35 dB (9/125 μm)  
 Port 2: filtered 1625 nm, 35 dB (9/125 μm)

#### Probe

00 = Without probe  
 FP4S = Inspection probe (400x)  
 FP4D = Inspection probe (200x/400x)

Example: MAX-700-S2-RF-FPSA-VPM2X-FOA-22-FP4D-MAX-710-M1-EI-EUI-89

#### Notes

- If power meter is selected.
- For the MAX-730-M2 model, the second available connector must be the same as the first connector selected.

## EI CONNECTORS



To maximize the performance of your OTDR, EXFO recommends using APC connectors. These connectors generate lower reflectance, which is a critical parameter that affects performance, particularly dead zones. APC connectors provide better performances than UPC connectors, thereby improving testing efficiency.

Note: UPC connectors are also available, simply replace EA-XX by EI-XX in the part number.

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: +1 418 683-0211 | Fax: +1 418 683-2170 | info@EXFO.com

Toll-free: +1 800 663-3936 (USA and Canada) | [www.EXFO.com](http://www.EXFO.com)

EXFO America	3400 Waterview Parkway, Suite 100	Richardson, TX 75080 USA	Tel.: +1 972 761-9271	Fax: +1 972 761-9067
EXFO Asia	100 Beach Road, #22-01/03 Shaw Tower	SINGAPORE 189702	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	36 North, 3 <sup>rd</sup> Ring Road East, Dongcheng District Room 1207, Tower C, Global Trade Center	Beijing 100013 P. R. CHINA	Tel.: + 86 10 5825 7755	Fax: +86 10 5825 7722
EXFO Europe	Omega Enterprise Park, Electron Way	Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 23 8024 6810	Fax: +44 23 8024 6801
EXFO Finland	Elektronikkatie 2	FI-90590 Oulu, FINLAND	Tel.: +358 (0)403 010 300	Fax: +358 (0)8 564 5203
EXFO Service Assurance	270 Billerica Road	Chelmsford, MA 01824 USA	Tel.: +1 978 367-5600	Fax: +1 978 367-5700

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at [www.EXFO.com/specs](http://www.EXFO.com/specs).

In case of discrepancy, the Web version takes precedence over any printed literature.