99 Washington Street Melrose, MA 02176 Phone 781-665-1400 Toll Free 1-800-517-8431

COMMUNICATIONS TEST & MEASUREMENT SOLUTIONS

T-BERD®/MTS-2000 Handheld Modular Test Set

Fiber Optic Multi-Test Tool for Smarter, Faster Field Testing



Key Benefits

- Certify fiber physical layer on FTTx/PON, Access, Metro and Enterprise networks.
- Ensure highest quality connectorizing, splicing and turnup of new fiber links.
- Improve workflow with hands-free solution driving best practices to IEC standards.
- · Smarter and faster field testing with simple setup and instantaneous pass/fail results.
- Boost productivity with improved report generation and flexible connectivity.

Key Features

4000

- Large 5-inch touch screen display
- Field-installable modules
- Wide range of OTDR modules, including Quad and PON
- FiberComplete automated IL/ORL, PON power meter, and CWDM analyzer
- Automated fiber inspection and IEC pass/fail analysis
- Optional built-in optical power meter, visual fault locator (VFL), and optical talk set
- New-generation Lithium Polymer (LiPo) battery for 8 hours operation
- Flexible connectivity with Ethernet, USB, Bluetooth and WiFi capabilities

· Special hands-free bag as standard

for the success of today's fiber optic networks. Selecting the right test tools has become key toward meeting these needs.

Costs, workflow, quality, network performance, and customer experience are critical

The JDSU T-BERD/MTS-2000 is a handheld multi-test platform that provides field technicians with a single handheld unit to install, turn-up and maintain these networks to the highest standards.

Its innovative design and hands-free bag ensure that all essential fiber test tools are close at hand, whatever the job or location. A large color screen with graphical user interface drives simple operation and optimal workflow in the field.

Test capabilities include a range of OTDR modules for multimode and single-mode testing, as well as a range of FiberComplete™ modules for automated Insertion Loss/ Optical Return Loss (IL/ORL), and fault finding. Both OTDR and FiberComplete modules are passive optical network (PON) optimized. The unit is also ready for connector end face pass/fail analysis to IEC standards with a digital analysis microscope.

The PON power meter and CWDM-OSA modules also enable turn-up and troubleshooting of PON and coarse wavelength division multiplexing (CWDM) networks.

All the test tools close at hand







Widest Range of Applications for Maximum Flexibility

The T-BERD/MTS-2000 provides the largest range of test capabilities o \boxtimes ered in one handheld unit. The modular design allows service providers the maximum flexibility to scale their investment and evolve with the growth of their network.


The T-BERD/MTS-2000 supports the whole range of essential fiber analysis tools, such as connection inspection, connection check, source, power meter, ORL, OTDR, PON selective power meter, and CWDM optical spectrum analyzer.




 $Application\ modules\ used\ with\ the\ T-BERD/MTS-2000\ can\ also\ be\ used\ with\ the\ T-BERD/MTS-4000,\ and\ the\ two\ products\ are\ interoperable.$

Boosted Productivity with Seamless Data Workflow

The T-BERD/MTS-2000 integrates various communication capabilities allowing remote control, data and setup uploads/downloads, and report transfer. The unit has one high-speed 1 Ethernet port, three USB ports, and optional WiFi and Bluetooth network connections.

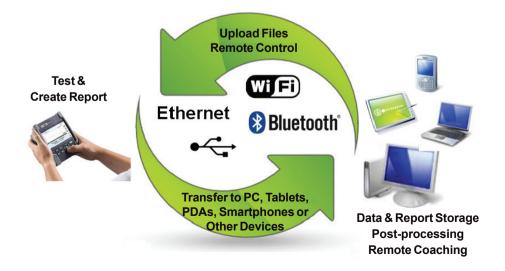

Design of the T-BERD/MTS-2000 optimizes operational efficiency

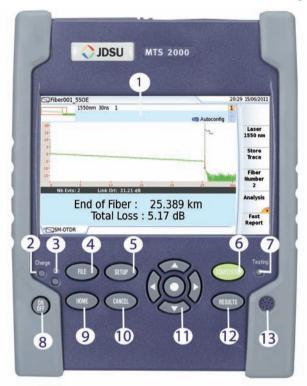



- 1 5-inch touch screen
- 2 Charge indicator
- 3 On indicator
- 4 File menu
- **5** Setup menu
- **6** Start/Stop
- 7 Testing indicator
- 8 On/O⊠
- **9** ⊠ ome page
- **(1)** Cancel
- Direction
 \[
 \omega alidation keys
 \]

- Results page
- B Loudspeaker
- ⚠ eadset jack
- **6** AC/DC input
- 16 Slave mini USB port
- **®** RJ45 connector
- (B) Master USB ports (2)
- 1 Power meter port
- **20** FL or Talk set port
- ② WiFi
 ☑ Bluetooth
- Stylus for touchscreen







Specifications

| General (Typical at 25°C) | | |
|---------------------------|-----------------|------------------------------|
| Display | 5-inch TFT o | color touch screen (12.5cm) |
| | F | Resolution 800 x 480 WVGA |
| Interfaces | | Two USB2.0 ports |
| | | One mini-USB2.0 port |
| | RJ | -45 LAN 10/100/1000Mbps |
| | В | uilt-in Bluetooth (optional) |
| | Built-in W | /iFi 802.11 b/g/n (optional) |
| Internal memory | | 1GB (128MB for storage) |
| Battery | Rechargeab | le Lithium-Polymer battery |
| 8 hours | of operation as | per Telcordia GR-196-CORE |
| Power supply | AC/DC | adapter, input 100-250 VAC, |
| | 50-60Hz; 2.5 | 5A max, output 12VDC, 25W |
| | Electrical | l safety: EN60950-compliant |
| Size with module (H | xWxD) | 175 x 138 x 80mm |
| | | (6.9 x 5.4 x 3.2in) |
| Weight | | |
| with battery | | 0.864 kg (1.89 lbs) |
| with battery and LM OTDR | | 1.21 kg (2.67 lbs) |
| Temperature | Operating: | -20 to +50°C (-4 to 122°F) |
| | Storage: | -20 to +60°C (-4 to 140°F) |
| Humidity non-conde | nsing | 95% |

| Built-in Power Meter Specifications ⁽¹⁾ | | |
|--|-------------------------------|--|
| Calibrated wavelengths | 850/1310/1490/1550/ 1625/1650 | |
| Wavelength range | 800 to 1650 nm in 1 nm steps | |
| Accuracy ⁽²⁾ | ±0.2 dB | |
| Measurement range(3) | +5 to −50 dBm | |
| Maximum resolution | 0.01 dB/0.01nW | |
| Connector type | Universal Push Pull (UPP) | |
| .1 | , | |

| 32dB (typical) |
|---------------------------|
| SC, FC, and UPP |
| (three adapters included) |
| |

- (1) At 25°C, after 20 minutes stabilization time and after zero setting.
- (2) At calibrated wavelength (except 1650nm) (3) -45dBm from 800 to 1250 nm

| Built-in Visual Fault Locator VFL | | |
|-----------------------------------|------------------------------------|--|
| Wavelength | 650 nm | |
| Emission mode | CW, 1Hz | |
| Laser class | Class 2 as per standards EN60825-1 | |
| | and FDA21 CFR Part 1040.10 | |

| Ordering information | |
|---|-------------------|
| T - BERD/MTS-2000 Handheld Modular Test Set | ETB2000T/ EM2000T |
| Includes: touch screen, hands-free soft case, shoulder strap, power supply with 5 adaptable plugs (US, Europe, UK, Australia, Japan), one USB cable, one Getting Started manual | |
| Built-in optical power meter and VFL, with 2.5 mm UPP connectors | E20PMVFL |
| Built-in optical power meter with 2.5 mm UPP connector | E20PM |
| Built-in visual fault locator (VFL) with 2.5 mm UPP connector | E20VFL |
| Built-in optical power meter and talk set | E20TSPM |
| Bluetooth option for T-BERD/MTS-2000 Modular Test Set | E20BLUE |
| USB2.0 digital video scope kit (P5000i), including 7 tips and soft case | EDFSCOPE5Ki |
| Soft carrying case for T-BERD/MTS-2000/4000 | E40SCASE1 |
| Hard carrying case for T-BERD/MTS-2000 Modular Test Set | E20HCASE |
| 12V car adapter for T-BERD/MTS-2000/4000 | E40LIGHTER |

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176 - TestEquipmentDepot.com